

JAMES4

Quick Start

Content of the box

- JAMES4 (base module)
- Smartphone's packaging
- Cover lid for the smartphone (compact mode)
- Lid for complete cover (dual mode)
- 230V power supply for plugging the charger into the mains supply (white carton)
- Electronic casing for connecting of the connector(s)
- Inductive charger for JAMES4
- Spare M6 cage nut

Introduction



1. Front camera
2. Left operating LED
3. Right operating LED
4. Charging LED
5. Connection LED
6. Magnet detector to switch on
7. Magnet detector to switch off
8. Infrared receptor
9. Green "Charge ON" LED
10. Red "Error" LED
11. Attaching plate (1/4")
12. External USB charger.
13. Blue "Power ON" LED
14. Main connector for the charger's power supply.


SmartPhone



!!! In compact mode, **Do not remove** the black sticker. (Beside the USB) !!!

Connecting the battery of JAMES4

In storage, the battery of JAMES4 is disconnected. You need to connect the battery (see the photos below), then, connect the smartphone (according to option) and then put the cover onto the JAMES4 before charging.

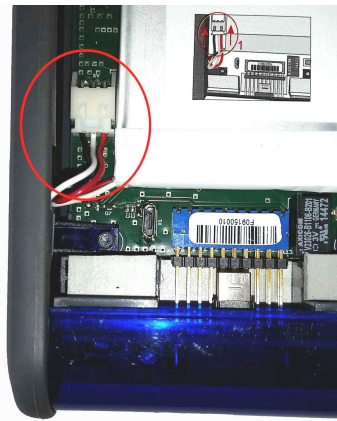

SIM card insertion

Your device accepts solely micro SIM cards. To insert the micro SIM card, please refer to the user's guide found inside the smartphone's box.

Assembly of JAMES4



When inserting the smartphone in its casing, see to it that it is carefully connected to the connector.



Next, slide the smartphone down so that the cover can then be inserted on top.



Rotate JAMES4 180 degrees. (the top of the casing towards you). With the help of both thumbs, push the top of the cover down.

It is essential to insert the cover beginning from the top.



With both thumbs, alternately push the cover down along the length of the smartphone.



End by carefully inserting the bottom of the cover into the casing.



Once the cover is in place, adjust the rubber on each side while firmly holding the casing from below, as shown in the image.


The first steps . . .

Charging

Before switching JAMES4 on for the first time, let the battery charge for at least 30 minutes. To do this, connect the 230V power supply to the inductive charger, the blue power LED (12) should light up. Insert JAMES4 on the pegs of the inductive charger, JAMES4's charging LED (4) should light up and the charger's green charging LED (9) should flash.

Switching ON

To switch on JAMES4, place it on the lower right corner (logo FST) on the middle of the inductive charger.

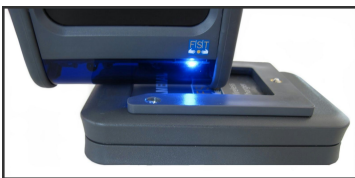

A LED should light up to confirm that it has been switched on. Indications of directions are printed underside on the casing.

Configuration

When you start JAMES4 for the first time, a guide on configuration will appear to help you configure the basic parameters and connect to some accounts. All of these parameters can be subsequently changed.

Using the keys



Back: on the left, allows you to go back to the previous screen.



Home: in the middle, allows you to return to the default or home page.



Switch: on the right, allows you to switch to another previously launched application

Base applications



Make calls by dialing a number



Create your own contacts list and interact with them



Send SMS or template messages

Access to parameters

To access the parameters, slide the notifications bar down. In these parameters, it is possible to :

- Turn JAMES4 off
- Lock and unlock JAMES4
- Access the parameters of JAMES4 and the phone.

Note:

Lock mode allows the use of the device.

Unlock mode allows the configuration and the programming of JAMES4

Complete manual for JAMES4

Below are the links to access the complete manual for using JAMES4.

- **FR:**
http://www.james4.ch/manual_fr.pdf
- **EN:**
http://www.james4.ch/manual_en.pdf
- **DE:**
http://www.james4.ch/manual_de.pdf

Orientation in the interface

The installation and the configuration of the contactors can be done via the menus

- Settings
 - Access
 - Scanning



Fichier : Quick Start EN-1v3